



Kanga Hurricane Owner's Manual

The Kanga Company, Inc.
Customer Service Center
3217 W. Smith St #1
Seattle, WA 98199
1 (800) 347-9793 Fax (206) 782-0651
kangaco.com

PLEASE READ BEFORE USING YOUR NEW KANGA HURRICANE ROOFPOUCH


Congratulations! You have just purchased the finest flexible car top luggage carrier made. With proper care and use, your Kanga RoofPouch should provide years of convenient, attractive and functional travel storage space. This RoofPouch is designed for use with or without standard-size permanent or removable car top roof racks. It can be used on many, though not all, vehicles without a roof rack.

Your Kanga RoofPouch comes with four straps with metal cam buckles and 2 extender straps needed to attach to most vehicles. Please be sure to read this manual thoroughly to ensure proper attachment. If you have any questions or concerns regarding correct attachment, please call us at: 800-347-9793

SECURING


For Vehicles With a Roof Rack:

Depress the lever on the metal cam buckle and pull the end of the webbing out of the buckle. Extend the webbing end around the rack bar and then insert the webbing back into the metal cam buckle. Pull that webbing end and cinch it down tightly. Repeat with all 4 straps. See figure 1 for webbing configuration.

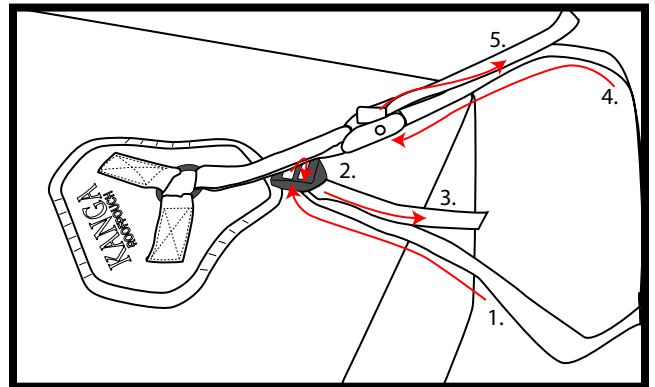

For Vehicles With No Roof Rack

Your pouch comes with a set of 2 - 12' webbing straps. Remove the small 4' straps from the buckles on the bag. Weave the end of the 12' strap through the metal cam buckle on one side of the bag, until you have approximately 12" of excess webbing past the cam buckle. Feed the other end of the webbing through the interior of the vehicle, and bring the webbing end up to the cam buckle on the other side of the bag. Feed the end of the strap through the cam buckle and cinch both side tight. Repeat this process for the other strap. See figure 2 and 3.

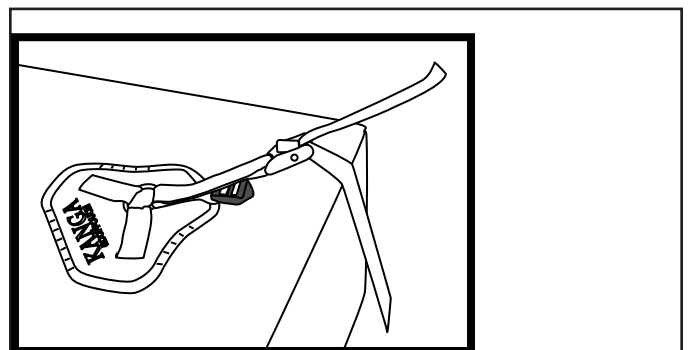


LOADING

1. Unfold your pouch in a clean area and completely unzip.
2. Ensure the roof of your vehicle is free of debris.
3. Center the empty, unzipped pouch onto a clean rooftop with the no-zipper side facing forward and the logo facing up.
4. Open the top lid and lay it over your windshield.
5. Begin loading the pouch from the front to the back. Try to distribute the load as evenly as possible. Use soft items such as pillows and coats to fill gaps in the pouch.
6. Once the pouch is loaded, zipper the top closed and begin strapping it down.

Note:

Packing the pouch full will help eliminate wind flap. If the bag is allowed to flap, it will lead to deterioration of the material. The fuller the pouch is, the less wind flap there will be.

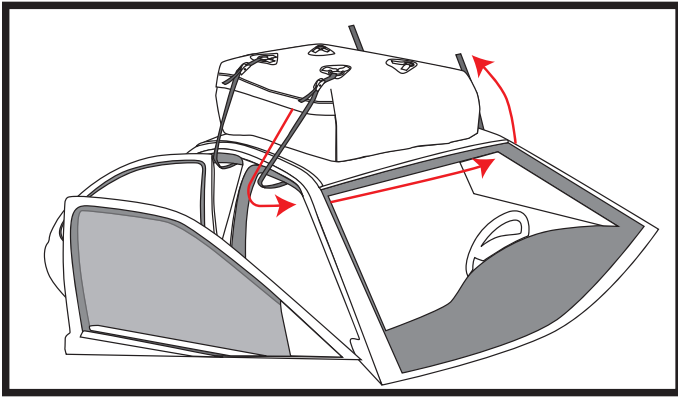

Warning:

AN IMPROPERLY SECURED ROOFPOUCH CAN FLY OFF OF THE VEHICLE, POTENTIALLY CAUSING DAMAGE TO YOUR GOODS AND/OR INJURY TO OTHERS. PLEASE BE SURE TO THOROUGHLY INSPECT FOR PROPER FIT AND ATTACHMENT PRIOR TO EACH USE.

If at any time you hear flapping, pull off the road as soon as it is safe and check the straps. Excessive flapping WILL damage the RoofPouch. Always ensure that the straps securing the RoofPouch are tight.

HELPFUL HINTS:

Cleaning the RoofPouch: Use a sponge or clean rag with mildly soapy water, then wipe off with a clean, dry or mildly damp cloth. DO NOT USE solvents, petroleum-based or other harsh cleaning agents, wire brushes or sharp tools to clean your RoofPouch. After each use, thoroughly hang-dry your RoofPouch and ensure that it is completely dry before storage. Shake off any dirt and debris.

Roof Care: Never put anything between your vehicle and the RoofPouch except a non-slip pad. Also check the specification of your vehicles roof load limit and do not exceed it.

Overloading: Do not put so much inside that it is difficult to close the zipper. This will split the zipper.

Sharp Objects: Make sure any sharp objects are protected from puncturing the bag.

Straps are not handles: Never pull a loaded pouch off the roof or try to put a loaded pouch on the roof.

Clearance: Be careful entering your garage or low clearance area when the RoofPouch is on your vehicle.

WEATHER RESISTANCE: YOUR ROOFPOUCH IS MADE OF WATERPROOF FABRIC, WHICH REDUCES MOISTURE PENETRATION. ALTHOUGH WE USE THIS FABRIC AND THE ROOFPOUCH HAS RAIN FLAPS OVER THE ZIPPER, ROOFPOUCHES ARE NOT 100% WATERPROOF AND WE DON'T CLAIM THEM TO BE.

LIMITED WARRANTY

The Kanga Company proudly warranties all new Kanga RoofPouches to be free from any defects in materials and workmanship when used under normal conditions by the original purchaser for a period of one year from the date of purchase. Any unit found to be defective during the warranty period will be repaired or replaced at the sole option of the Kanga Company, Inc.

Since the Kanga Company has no control over the attachment of its products to any vehicle, the Kanga Company disclaims any and all liability for damage or injury which might occur as a result of the improper use or installation of the Kanga RoofPouch. Normal wear and tear of merchandise or damage resulting from misuse, accidents or alterations are not covered by this warranty. DAMAGE OF ANY KIND RESULTING FROM MOISTURE PENETRATION IS SPECIFICALLY EXCLUDED FROM THIS WARRANTY.

To submit any product for warranty consideration, please return the RoofPouch with the original dated sales receipt showing the retail price paid for the product, plus \$10.00 for handling and shipping to the address below.



The Kanga Company, Inc.
Customer Service Center
3217 W. Smith St. #1
Seattle, WA 98199
1 (800) 347-9793 Fax (206) 782-0651
www.Kangaco.com